



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

Publication number:

0 309 201  
A2

## EUROPEAN PATENT APPLICATION

Application number: 88308709.0

Int. Cl. 4 G06K 7/08

Date of filing: 20.09.88

Priority: 22.09.87 JP 238212/87  
15.10.87 JP 260425/87  
10.11.87 JP 282202/87

Date of publication of application:  
29.03.89 Bulletin 89/13

Designated Contracting States:  
FR GB

Applicant: Hitachi Maxell Ltd.  
No 1-1-88, Ushitora Ibaraki-shi  
Osaka-fu(JP)


Inventor: Katayama, Yousuke  
2-1-401, Togashira-1-chome  
Toride-shi(JP)

Representative: Williams, Trevor John et al  
J.A. KEMP & CO. 14 South Square Gray's Inn  
London WC1R 5EU(GB)

### Method and system of communication for a non-contact IC card.

Disclosed is a data communication system comprising an external unit, such as a card reader writer (1), with the ability of reading and writing data for a recording medium, and the recording medium, such as an IC card (2) which transacts signals with the external unit by being coupled electromagnetically in non-contact fashion with the external unit and supplied power from the external unit. The external unit comprises a first data processor (6), a first electromagnetic transducing coil (14) for the electromagnetic coupling with the medium, a carrier wave generator (5) connected to the first coil for generating a carrier for transmitting a signal to the recording medium, and a received signal discriminator (7). The recording medium comprises a second data processor (11), a second electromagnetic transducing coil (15) for the electromagnetic coupling with the external unit, a switching circuit (10) connected to the second coil for varying the load impedance of the second coil in response to a signal to be sent to the first coil, and a received signal detecting circuit (9). The data signal from the recording medium is demodulated for the carrier frequency from the external unit in response to the data signal, and transmitted to the external unit. The recording medium includes circuits (18, 20) which detect a variation in the power voltage supplied through the electromagnetic coupling and feed it back electromagnetically to the external unit.

FIG. 1

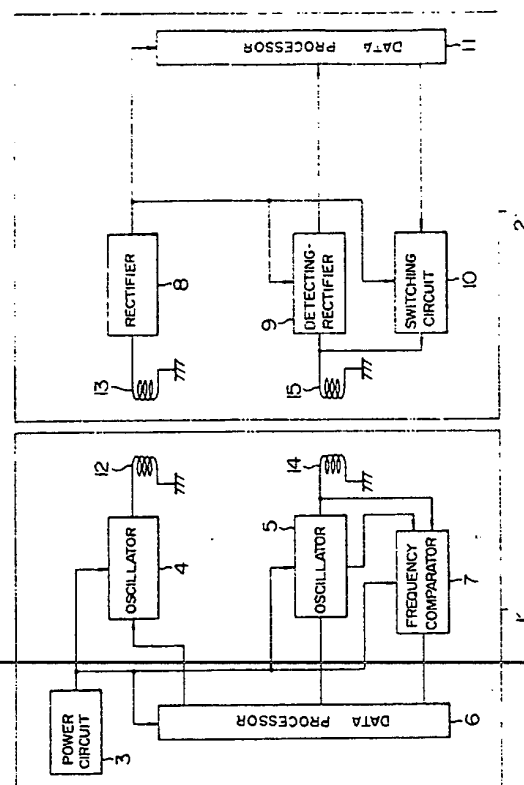

# METHOD AND SYSTEM OF COMMUNICATION FOR A NON-CONTACT IC CARD

## BACKGROUND OF THE INVENTION

This invention relates to a non-contact, magnetically-coupled communication technique, and particularly to an improved method and system of communication for a non-contact IC card.

Communication of data between a non-contact IC card and a data reader writer (or a host system), such as a host computer or an IC card reader writer (will be termed simply "reader writer" hereinafter), takes place through the provision of a transmission circuit and a reception circuit on both sides of the data reader writer and the IC card.

In case of communication by non-contact, electromagnetic coupling (or electromagnetic coupling) between the IC card and the reader writer, the transmission circuits on both sides need to have a carrier generating circuit for producing a signal transmission carrier wave, and the circuit is considerably complex. Therefore, it is difficult to make the circuit more compact and make the card thinner.

## SUMMARY OF THE INVENTION

An object of this invention is to provide a data communication system which links a data reader writer to a recording medium such as an IC card on the basis of non-contact, electromagnetic coupling, with the intention of eliminating the need for an oscillation source on the part of the recording medium and simplifying the circuit.

Another object of this invention is to provide a data communication system based on non-contact, electromagnetic coupling, in which a functional recording medium has its power voltage, which is supplied through electromagnetic coupling from the external equipment, stabilized easily on the part of the external equipment.

In order to achieve the above objectives, the inventive non-contact, electromagnetically coupled communication system comprises a first transceiver and a second transceiver in non-contact, electromagnetic coupling, in which the first transceiver includes a first electromagnetic transducer used for the electromagnetic coupling with the second transceiver and a carrier generating circuit in connection with the transducer for producing a carrier wave for transmitting a signal to the second transceiver, and the second transceiver includes a second electromagnetic transducer used for electromagnetic coupling with the first transducer and a circuit in connection with the second transducer for operating to vary the load impedance of the sec-

ond transducer in response to a signal transmitted to the first transceiver, the first transceiver receiving a signal from the second transceiver by detecting a change in the frequency of the carrier of the signal.

In the case of an IC card system, as an embodiment of this invention, the above-mentioned second transceiver is an IC card, in which are included a power source circuit which provides power by transforming a field of electromagnetic energy into a d.c. power voltage or owes the power source to a battery, a coil which is placed in the electromagnetic field produced by an oscillation circuit of the reader writer, a circuit which detects and rectifies the energy captured by the coil to produce a signal, a circuit which connects or disconnects (ON/OFF) the coil so that the resonant frequency of the space is varied, and a circuit which implements data processing, so that the whole IC card circuit operates on the power provided by the power source circuit, and the above-mentioned first transceiver is an IC card reader writer, with the provision of a reader writer or host computer, in which are included an oscillation circuit which produces a carrier modulated by a signal to be sent to the IC card, and a frequency comparison circuit which demodulates a change in the carrier frequency.

Namely, the carrier generating circuit and frequency comparison circuit are placed on the part of the reader writer, while the circuit for detecting energy on the coil and rectifying it into data and the circuit for connecting or disconnecting the coil are placed on the part of the IC card. In transmitting data from the reader writer to the IC card, the oscillation circuit is operated, energy is received on the coil, and the oscillation circuit is connected or disconnected. In transmitting data from the IC card to the reader writer, the oscillation circuit is kept operating and the coil is disconnected (e.g., grounded) in compliance with the transmitted data, so that a change in the oscillation frequency caused by the impedance variation is entered to the frequency comparison circuit and it releases reception data on the basis of the oscillation frequency variation.

As described, the second transceiver varies the impedance of the electromagnetic transducer of the first transceiver to vary the resonant frequency of the carrier generator, whereby the second transceiver can have data transmission to the first transceiver without the need of having an oscillation circuit. Consequently, the second transceiver has

its transmission circuit simplified with less number of component parts, resulting in an improved reliability, and it is especially suitable when applied to IC cards.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the communication for a non-contact IC card to which is applied the inventive non-contact, electromagnetically coupled communication system;

Fig. 2 is a block diagram showing the communication for a non-contact IC card, which employs a different power supply system, to which the inventive non-contact, electromagnetically coupled communication system is applied;

Fig. 3 is a block diagram showing the communication for a non-contact IC card, which employs a still different power supply system, to which the inventive non-contact, electromagnetically coupled communication system is applied; and

Figs. 4 and 5 are block diagrams showing other embodiments of this invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of this invention will be described with reference to the drawings.

Fig. 1 is a block diagram showing the communication for a non-contact IC card to which the inventive non-contact, electromagnetically coupled communication system is applied. In Fig. 1, indicated by 1 is an IC card reader/writer which accepts a non-contact IC card (will be termed simply "IC card" hereinafter) 2. The IC card 2 is supplied with its operating power from an oscillation circuit 4 of the reader/writer 1 on its receiving coil 13 which is in non-contact, electromagnetic coupling with a sending coil 12 of the reader/writer 1. The oscillation circuit 4 supplies a signal of around 200 kHz, for example, to the sending coil 12 and it is received by the receiving coil 13 in the form of the electromagnetic field, and thus power is transferred. The power received on the receiving coil 13 is transformed into a d.c. voltage by a rectifying circuit 8 and distributed to the whole circuit in the IC card 2. Indicated by 3 is a power circuit provided in the reader/writer 1 and it supplies power to its whole circuit.

On the other hand, the reader/writer 1 transmits data to the IC card 2 from a data processor 6 including a microprocessor or the like by way of an associated oscillation circuit 5 and transceiving coil 14. The oscillation circuit 5 generates a carrier of

around 10 MHz, for example, which is turned on and off for output by the transmission data provided by the data processor 6. Namely, data transmission is based on "tone burst" mode.

The tone-burst data transmitted in the form of electromagnetic field from the transceiving coil 14 is received by a transceiving coil 15 of the IC card 2 which is in non-contact, electromagnetic coupling with the coil 14, and, after it is demodulated into a digital signal by a detecting rectifier 9, sent to the data processor 11 incorporating a microprocessor or the like. Data transmission from the IC card 2 to the reader/writer 1 takes place while the oscillation circuit 5 of the reader/writer 1 is kept operating. A switching circuit 10 located at the node of the transceiving coil 15 and detecting rectifier 9 of the IC card 2 is operated so that the coil 15 is connected or disconnected in accordance with data to be transmitted.

The on-off control of the switching circuit 10 is such that when it is "on", a bias voltage or power voltage is applied to the terminal of the coil 15 in connection to the detecting rectifier 9 so that a d.c. current flows, while the terminal is grounded when it is "off". The "on" state causes the transceiving coil 15 to produce a d.c. magnetic flux, and it vanishes when the coil is in "off" state. The on-off control varies the impedance of the magnetic circuit of the transceiving coil 14, thereby causing the oscillation circuit 5 to vary the output frequency.

Another method of varying the impedance of the magnetic circuit is that the transceiving coil 15 is disconnected at its one terminal from the detecting rectifier 9 so that the coil 15 is open for the "off" state, and the terminals of the coil is connected directly or through a resistor for the "on" state. In the on-off control of the switching circuit 10, the transceiving coil 15 is not a magnetic flux generating circuit as opposed to the previous case, but it merely functions as a magnetic coupling circuit for varying the impedance of magnetic circuit by being coupled electromagnetically with the transceiving coil 14.

The on-off control of the switching circuit 10 varies the output frequency of the oscillation circuit 5, which is detected by a frequency comparison circuit 7, and the transmitted data is demodulated.

Based on the electromagnetic coupling between the transceiving coils 14 and 15, a change in the load impedance of the transceiving coil 15 is transferred as a signal to the transceiving coil 14, and it modulates the output signal of the oscillation circuit 5. As a result, a signal with a varying frequency is produced on the terminal of the oscillation circuit 5 in connection with the transceiving coil 14.

The varying frequency is compared by the frequency comparison circuit 7 with a reference

carrier frequency provided by the oscillation circuit 5, so that the transmitted data from the IC card 2 is detected, and the carrier signal is modulated in accordance with the detected data to retrieve the transmitted data. The reference carrier frequency signal is produced by the resonator or the peripheral circuit in the oscillation circuit 5 or by a separate clock oscillator or the like. The detected data is delivered to the data processor 6 in the reader/writer 1, and the data transmitted from the IC card 2 is processed.

Fig. 2 is a block diagram showing the inventive non-contact, magnetically coupled communication system applied to a non-contact IC card of a different power supply system. In Fig. 2, indicated by 1 is a reader/writer which accepts an IC card 2. The IC card 2 is supplied with its operating power from an oscillation circuit 4 of the reader/writer 1 on its receiving coil 13 which is in non-contact electromagnetic coupling with a sending coil 12 of the reader/writer 1. The oscillation circuit 4 supplies a signal of around 200 kHz, for example, to the sending coil 12 and it is received in the form of the magnetic field by the receiving coil 13, and thus power is transferred. The power received on the receiving coil 13 is transformed into a d.c. power by a rectifying-smoothing circuit 8 which is a power circuit in the IC card 2, and it is distributed to the whole circuit in the IC card 2. Indicated by 3 is a power circuit provided in the reader/writer 1, and it supplies power to its whole circuit.

Indicated by 18 is a voltage detection circuit which monitors the output voltage of the rectifying-smoothing circuit 8 and produces a control voltage, by which the oscillation frequency of a voltage-controlled oscillator (VCO) 17 is controlled. The VCO 17 delivers its output signal with the controlled frequency to a sending coil 20. Consequently, the signal produced by the VCO 17 is transmitted to a receiving coil 19 of the reader/writer 1 in magnetic coupling with the sending coil 20, and the signal received on the coil 19 is detected by a frequency change detection circuit 16, which generates data in compliance with the frequency variation of the received signal, and it is delivered to the data processor 6 incorporating a microprocessor or the like. On receiving the data, the data processor 6 issues a control signal to the oscillation circuit 4 so that its output voltage level is stabilized.

Next, the power voltage control in the IC card 2 will be described. If the IC card 2 and reader/writer 1 have a decreased gap therebetween, or the IC card has a decreased power consumption, the output voltage of the rectifying-smoothing circuit 8 will rise. Upon detecting a rising voltage, the voltage detection circuit 18 issues a corresponding control signal to the VCO 17, which in turn oscillates at a

frequency higher than the reference oscillation frequency.

The high-frequency signal is received by the frequency change detection circuit 16 by way of the sending coil 20 and receiving coil 19. The frequency change detection circuit 16 incorporates a frequency comparison circuit and an oscillator turned to the reference frequency of the VCO 17. The circuit 16 compares the frequency received on the receiving coil 19 with the reference frequency of the VCO 17, and produces a digital signal which represents an up-offset value from the reference frequency and sends it to the data processor 6. The data processor 6 is informed of a rising power voltage of the IC card 2 by receiving the data, and issues a control signal to the oscillation circuit 4 so that its output level is lowered.

Next, if the IC card 2 and reader/writer 1 have an increased gap therebetween, or the IC card has an increased power consumption, the output voltage of the rectifying-smoothing circuit 8 will fall. Upon detecting a falling voltage, the voltage detection circuit 18 issues a corresponding control signal to the VCO 17, which in turn oscillates at a frequency lower than the reference frequency. The low frequency signal is received by the frequency change detection circuit 16 by way of the sending coil 20 and receiving coil 19 in the same manner as above. The frequency change detection circuit 16 produces a digital signal which represents a down-offset from the reference frequency and sends it to the data processor 6. The data processor 6 is informed of the falling power voltage of the IC card 2 by receiving the data, and issues a control signal to the oscillation circuit 4 so that it raises the output level.

In this way, a variation in the power voltage of the IC card 2 is compensated by adjusting the supply of electromagnetic energy accordingly, and the IC card power voltage is stabilized.

The oscillation circuit 4 and sending coil 12 are a specific example of the electromagnetic transducer, and the receiving coil 13 is a specific example of electromagnetic transducers which convert electromagnetic energy into electrical energy. The VCO 17 is a specific example of control signal generation circuits, and the sending coil 20 is a specific example of control signal transmission circuits. The receiving coil 19 and frequency change detection circuit 16 are a specific example of control signal receiving circuits of this invention, and the data processor 6 is a specific example of control circuits.

The voltage detection circuit 18 is specifically a voltage comparison circuit or a voltage level conversion circuit, and generally it can be formed of operational amplifiers or transistor circuits without including capacitors and therefore can be formed

as an integrated circuit. The voltage detection circuit 18, when it is based on voltage comparison for example, employs two voltage comparators which produce detect signals at the upper and lower voltage levels. In response to the upper limit or lower limit detect signals, the VCO 17 is controlled to raise or lower the oscillation frequency from the reference oscillation frequency. On the other hand, the voltage detection circuit of the voltage level conversion mode will be a circuit which converts the output voltage of the rectifying-smoothing circuit 8 into the voltage control level of the VCO 17. If the VCO 17 can be controlled directly by the output of the rectifying-smoothing circuit 8, the voltage detection circuit 18 may be omitted.

Although in this embodiment a VCO is used, it may be replaced with any oscillation circuit which can operate at a higher and lower frequencies with respect to the reference frequency. Although in this embodiment the supplied electromagnetic energy is controlled so that the voltage variation is offset, an alternative scheme is to set the power circuit to produce a higher voltage thereby to supply a larger energy from the reader/writer and to stabilize the voltage, as in a voltage stabilization based on a zener diode, in the voltage detection circuit. This allows one-way control and simplifies the circuit arrangement.

For example, when a voltage comparison circuit is used for the voltage detection circuit, it is set to a higher voltage level and designed to produce a control signal for a certain lower voltage level, and in this case the voltage comparison circuit needs only one threshold level. Similarly, in case of using a level conversion circuit, the circuit is merely required to control the frequency to the higher or lower with respect to the reference value. For the frequency generation as a signal of regulating the voltage, it is of course possible to generate a lower value for a high voltage, or conversely a higher value for a low voltage.

Although in this embodiment the signal for adjusting the energy is sent as an oscillation frequency of VCO to the reader/writer, it may be data which simply corresponds to the current voltage value. In this case, a circuit may be provided to convert a detected voltage value or its deviation from the reference voltage value into a digital value so that a precise digitized power supply adjustment signal is sent to the reader/writer.

Although this embodiment is a communication system for an IC card through a reader/writer, this invention is applicable to general recording media including memory cards, and the partner equipment can be general external facilities such as a host computer.

As shown in Fig. 3, by placing a voltage stabilizer 21 between the rectifying-smoothing circuit 8

and voltage detection circuit 18 in the non-contact card in Fig. 2, it is possible that a small fluctuation of the IC card power voltage at the first stage is regulated by the stabilizer 21 and a larger fluctuation in excess of this regulation range is offset by adjusting the supplied electromagnetic energy thereby maintaining the power voltage of the IC card 2 constant. Such a 2-stage regulation allows a smaller capacitor in the smoothing circuit and a smaller current setting value at the steady-state operating point of the voltage stabilizer 21, whereby the overall power circuit has a decreased heat dissipation.

Although in this embodiment the power circuit for the IC card 2 is formed of an electromagnetic transducing circuit, it may use solar cells or super-sonic energy, or may be of a built-in battery type.

Although in this embodiment a comparison circuit is used to detect the variation of frequency, an alternative scheme is that transmitted data is detected by extracting a specific frequency through the filtering or the like and the data is demodulated through the waveform shaping, any circuit capable of detecting a frequency variation may be used.

Although in this embodiment the IC card has been described mainly, it can of course be applied to various information recording media such as memory cards incorporating a microprocessor or the like and memory cartridges. Furthermore, the invention is also applicable to non-contact, electromagnetically coupled communication systems intended for the communication between facilities in general based on the non-contact, electromagnetic coupling.

Fig. 4 shows a variation of the embodiment shown in Fig. 2, and the following describes the differences of the system from the preceding embodiment. Both embodiments have the same power supply system. In transmitting data from the reader/writer 1 to the IC card 2, the data processor 6 sends the data through a data transmission circuit 37 and sending coil 14 to the IC card 2. The data transmission circuit 37 generates a carrier with a frequency of around 10 MHz for example. The carrier is modulated in on-off mode by the data transmitted from the data processor 6. In this case, data transmission is of so-called tone-burst mode. The tone-burst data transmitted in the form of electromagnetic field through the sending coil 14 is received by the receiving coil 15 of IC card 2 in non-contact magnetic coupling with the coil 14, and, after it is demodulated into a digital signal by a data receiving circuit 39, delivered to the data processor 11 incorporating a microprocessor or the like.

Data transmission from the IC card 2 to the reader/writer 1 is carried out by a data transmission circuit 40 by way of a sending coil 46. Digital data

sent out of the data processor 11 is received by the data transmission circuit 40, which supplies a tone-burst signal to the sending coil 46 in the same manner as of the above-mentioned data transmission circuit 37. The signal is received by a receiving coil 42 of reader/writer 1 in electromagnetic coupling with the coil 46, demodulated by a data reception circuit 38, and, after it is transformed into digital, delivered to the data processor 6.

Fig. 5 shows a modification of the embodiment shown in Fig. 4. Similar to the power supply circuit of Fig. 3, a voltage stabilizer 21 is added between the rectifying-smoothing circuit 8 and the voltage detection circuit 18.

### Claims

1. A non-contact, electromagnetically coupled communication system comprising a first communicating unit (1) and a second communicating unit (2) coupled electromagnetically in non-contact fashion for communicating signals, wherein said first communicating unit comprises a first electromagnetic transducing circuit (14) for said electromagnetic coupling and a carrier wave generating circuit (5) connected to said first electromagnetic transducing circuit for generating a carrier wave for transmitting a signal to said second communicating unit, said second communicating unit comprising a second electromagnetic transducing circuit (15) for said electromagnetic coupling and a circuit connected to said second electromagnetic transducing circuit for varying the impedance of said second electromagnetic transducing circuit, said first communicating unit receiving a signal sent from said second communicating unit by detecting a change in the frequency of said carrier wave.

2. A system according to Claim 1, wherein said first communicating unit comprises a data write-and-read unit and said second communicating unit comprises an IC card, said first and second electromagnetic transducing circuits each comprising a coil, said second electromagnetic transducing circuit including means (10) of creating a variation in said load impedance by grounding or opening the connection of said second transducing circuit.

3. A system according to Claim 2, wherein said first communicating unit comprises means (7) of comparing the output frequency of said first electromagnetic transducing circuit with a reference carrier frequency of said carrier generating circuit for the sake of detecting a variation in the carrier frequency.

4. A non-contact data communication system comprising an external unit (1) with the ability of communicating function for reading or writing data for a recording medium (2) with the ability of com-

municating function, and said recording medium which transacts signals with said external unit by being coupled electromagnetically in non-contact fashion and supplied with power from said external unit, wherein said external unit comprises a power supply circuit (3) which supplies power in the form of electromagnetic energy to said recording medium, a control signal receiving circuit (19) which receives a control signal for controlling the intensity of generation of said electromagnetic energy by being coupled with said recording medium, a control circuit (16) which controls the quantity of electromagnetic energy generation by said power supply circuit in response to a signal from said receiving circuit, a first electromagnetic transducing circuit (14) for said electromagnetic coupling, and a carrier wave generation circuit (15) connected to said first electromagnetic transducing circuit for generating a carrier wave for transmitting a signal to said recording medium, and said recording medium comprises a transducing circuit (13) which converts electromagnetic energy received from said power supply circuit into electrical energy, a power circuit (18) which produces a d.c. power voltage from the electrical energy provided by said transducing circuit, a control signal generation circuit (18) which produces said control signal in response to a voltage of said power circuit, control signal output circuit (17) which is in electromagnetic coupling with said control signal receiving circuit for outputting said control signal, a second electromagnetic transducing circuit (15) for said electromagnetic coupling, and a circuit (10) connected to said second electromagnetic transducing circuit for varying the load impedance of said second electromagnetic transducing circuit in response to the transmitted signal, said external unit receiving a signal transmitted from said recording medium by detecting a variation in the frequency of said carrier wave and operating on said control circuit of said external unit using said control signal to maintain the output voltage of said power circuit constant.

5. A system according to Claim 4 further comprising a voltage stabilizing circuit (21), which maintains a constant output voltage of said power circuit, provided between said power circuit and said control signal generation circuit of said recording medium.

6. A non-contact data communication system comprising an external unit (1) with the ability of communicating function of reading or writing data for a recording medium (2) with the ability of communicating function, and said recording medium which transacts signals with said external unit by being coupled electromagnetically in non-contact fashion with said external unit and supplied with power from said external unit, wherein said external

unit comprises a power supply circuit (3) which supplies power in the form of electromagnetic energy to said recording medium, a control signal receiving circuit (19) which receives a control signal for controlling the intensity of generation of said electromagnetic energy by being coupled with said recording medium, and a control circuit (6) which controls the quantity of electromagnetic energy generation by said power supply circuit in response to a signal from said receiving circuit, and said recording medium comprises an electromagnetic transducing circuit (13) which converts electromagnetic energy received from said power supply circuit into electrical energy, a power circuit (8) which produces a d.c. power voltage from the electrical energy provided by said transducing circuit, a control signal generation circuit (18) which produces said control signal in response to the voltage of said power circuit, and a control signal output circuit (17) which outputs said control signal by being coupled electromagnetically with said control signal receiving circuit, at least said control signal generation circuit being an integrated circuit operating to control said control circuit of said external unit using said control signal so that the output voltage of said power circuit is maintained constant.

7. A system according to Claim 6 further comprising a voltage stabilizing circuit (21) which controls said power circuit to produce a constant output voltage and supplies power to the whole circuit of said recording medium, and means of supplying said output voltage to said control signal generating circuit so that said control signal generating circuit produces a control signal in response to said output voltage of said voltage stabilizing circuit.

8. A system according to Claim 6, wherein said control signal generating circuit comprises a voltage detecting circuit (18) for detecting a voltage of said power circuit and produces said control signal in response to the voltage detected by said voltage detecting circuit.

9. A system according to Claim 8, wherein said external unit comprises an IC card reader/writer, said recording medium comprises an IC card, said electromagnetic field generation circuit comprises an oscillation circuit (4) and a coil (12), said control signal output circuit comprises a coil, and said control signal generating circuit (21) comprises a voltage-controlled oscillation circuit and a voltage detecting circuit (18) for detecting a voltage of said voltage stabilizing circuit, said voltage detecting circuit producing a control voltage for said voltage-controlled oscillation circuit.

10. A functional recording medium (2) which is coupled electromagnetically in non-contact fashion with an external unit (1), which implements data reading or writing for said recording medium, and

adapted to transact signals with said external unit by being supplied with power from said external unit, said recording medium comprising a data processing circuit (11), an electromagnetic transducing coil (15) used for the electromagnetic coupling with said external unit and adapted to transmit an external signal to said data processing circuit, and a signal modulating circuit (10) which is connected to said electromagnetic transducing circuit and adapted to vary the impedance of said electromagnetic transducing circuit in response to a data signal sent from said data processing circuit, said coil, when being coupled electromagnetically with an electromagnetic transducing coil (14) of said external unit, enabling said external unit to reproduce a transmitted signal in the form of a variation in the frequency of a carrier wave supplied by said external unit on the basis of interaction between said carrier wave and said impedance variation.

11. A method of data communication for a communication system in which a first communicating unit and a second communicating unit are coupled electromagnetically in non-contact fashion for transacting signals, said method comprising the steps of:

generating a carrier wave for transmitting a signal by means of a carrier wave generator in said first communicating unit;

supplying said carrier wave to a first electromagnetic transducer of said first communicating unit and supplying an electromagnetically converted carrier wave to said second communicating unit;

varying the impedance of a second electromagnetic transducer of said second communicating unit in response to a signal to be transmitted to said first communicating unit; and

detecting a variation of frequency of said carrier wave, which is responsive to the impedance variation of said second electromagnetic transducer, by means of said first electromagnetic transducer so that said transmitted signal is reproduced.





FIG. 1

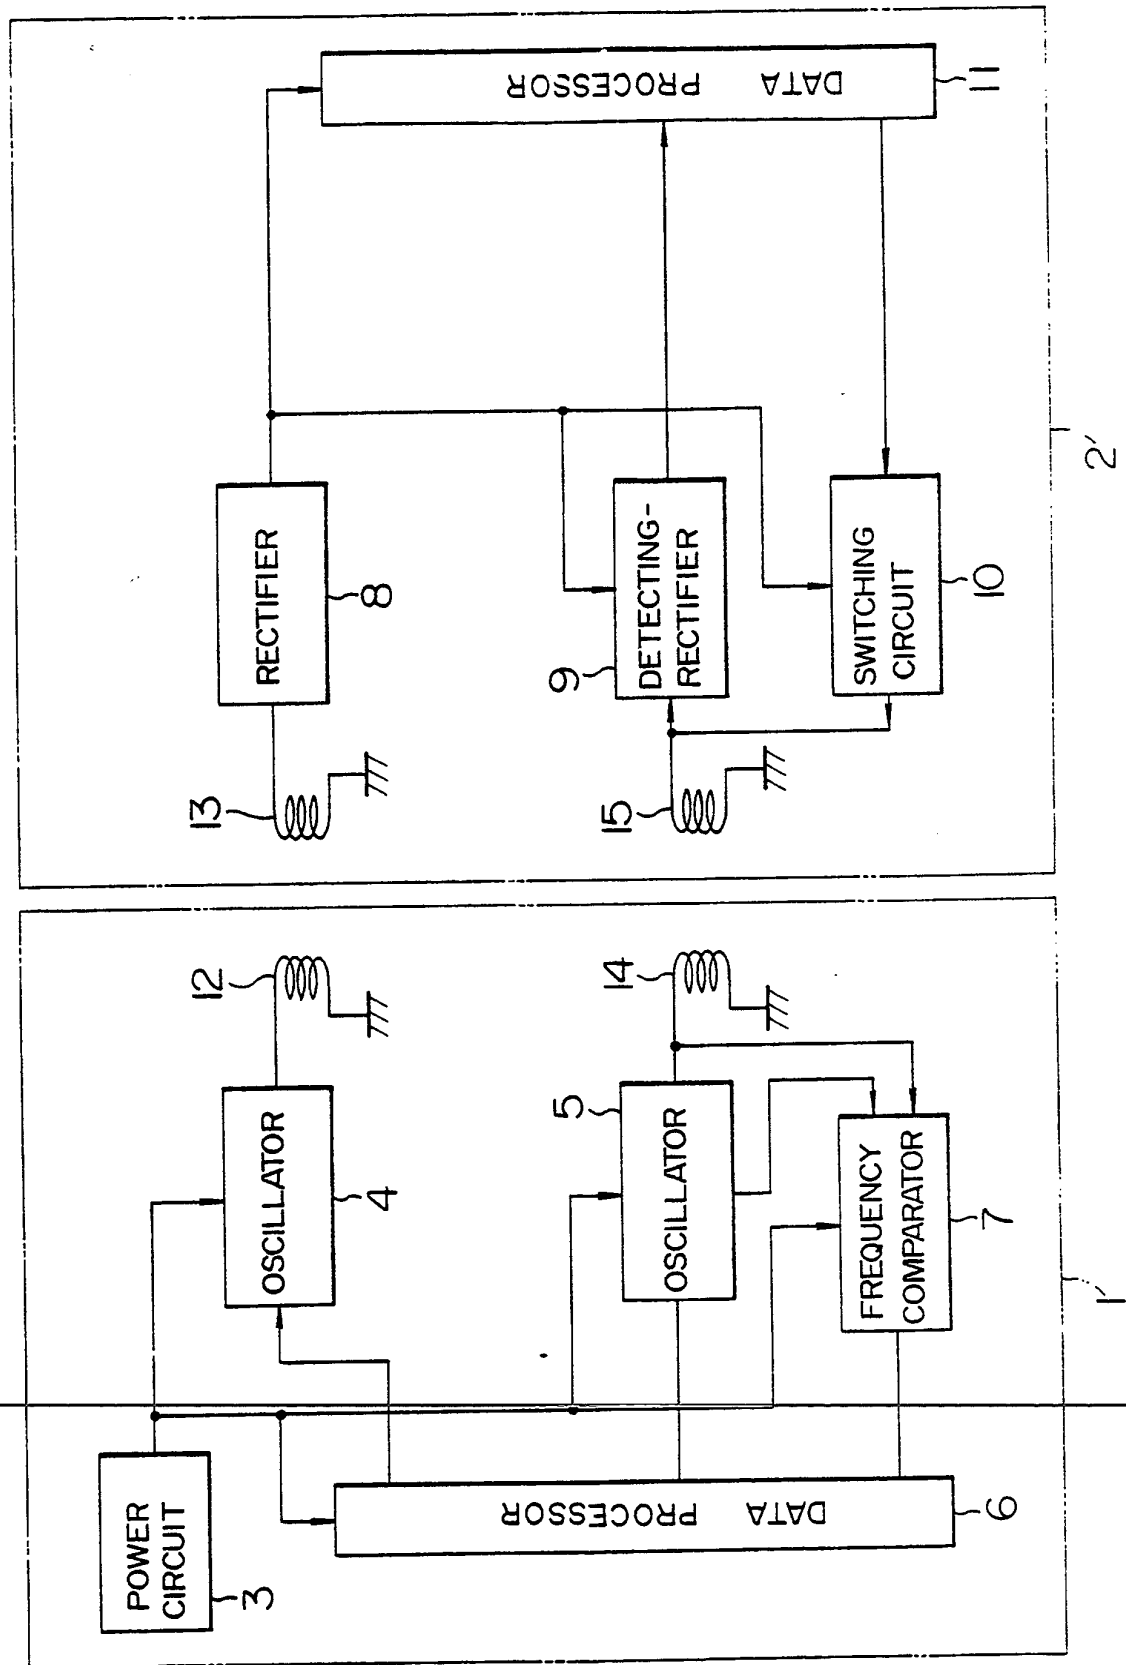




FIG. 2

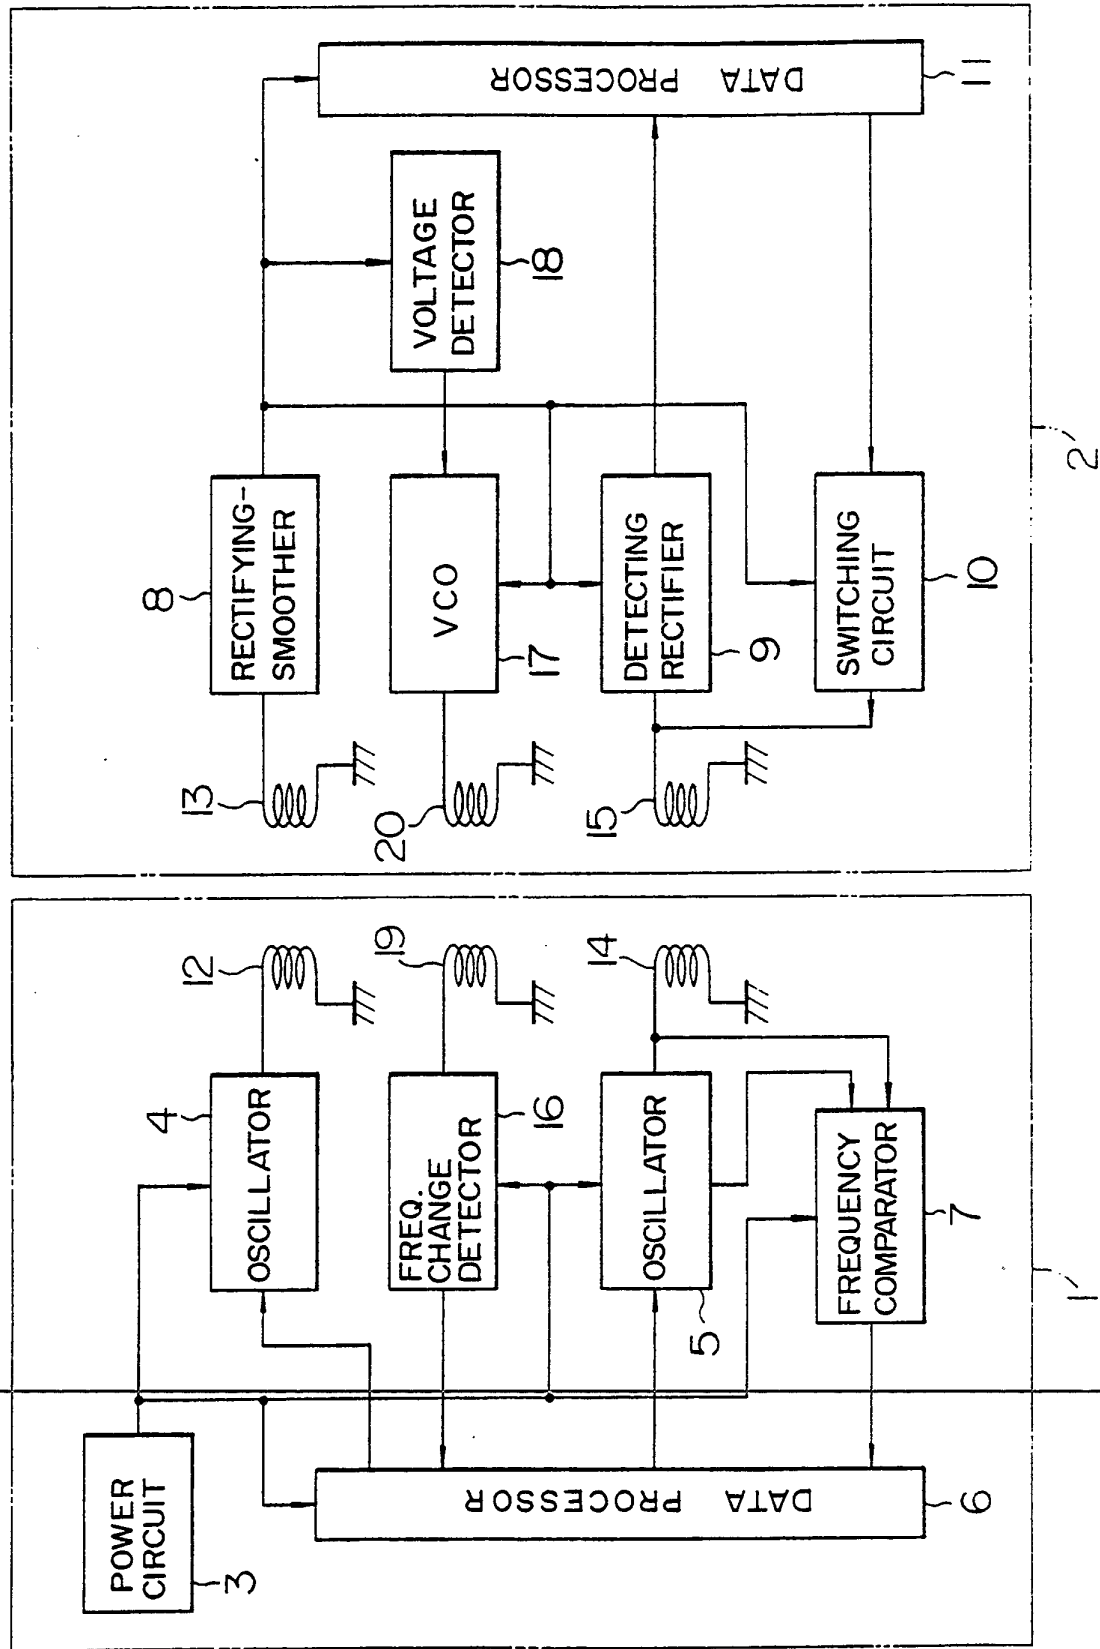
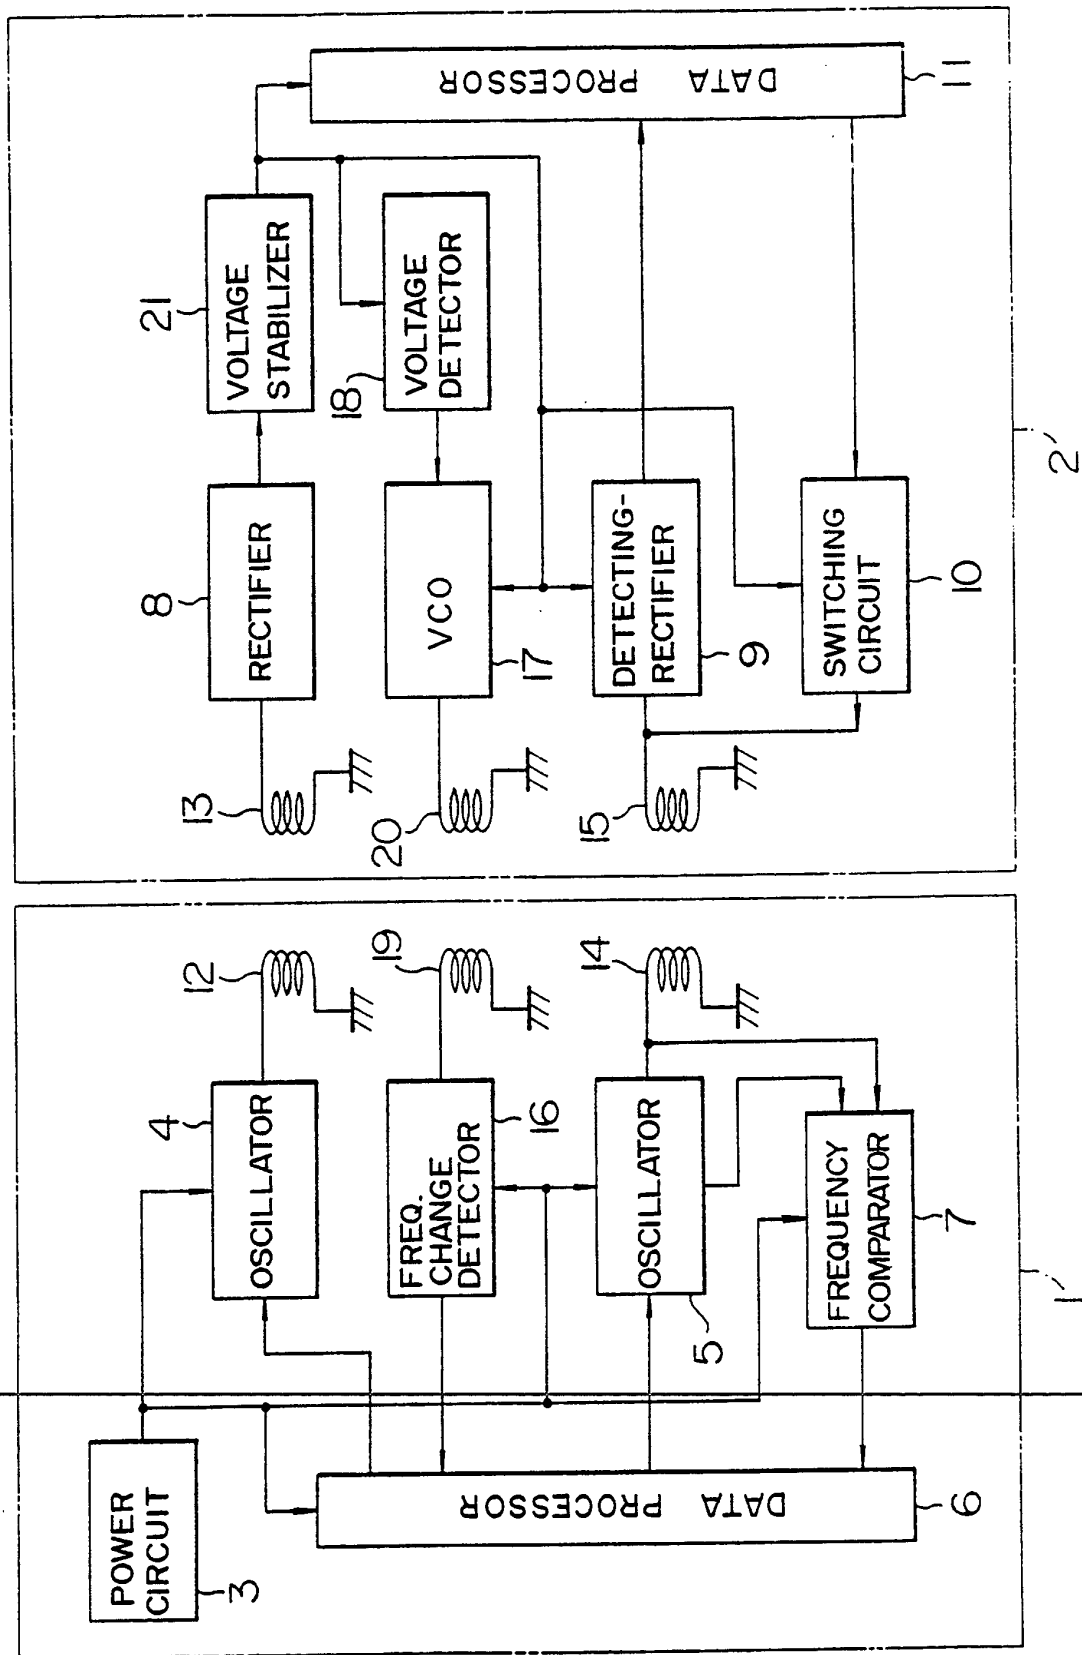




FIG. 3






FIG. 4


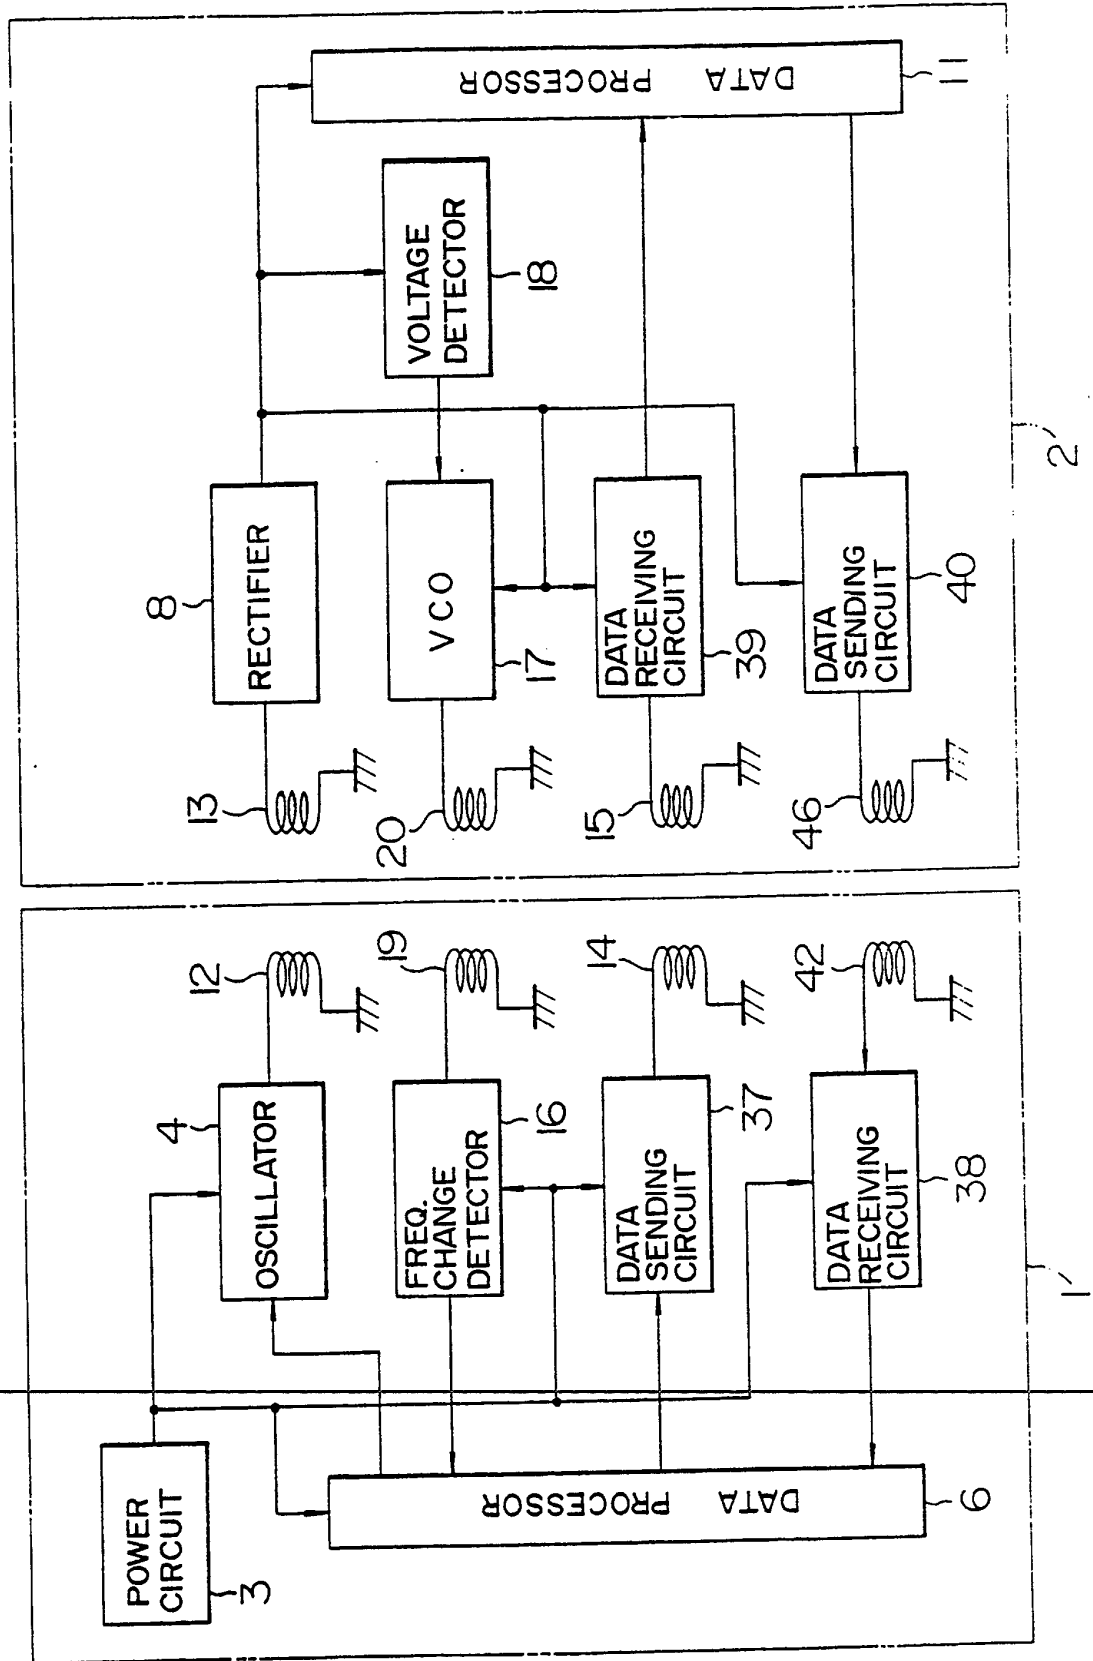






FIG. 5



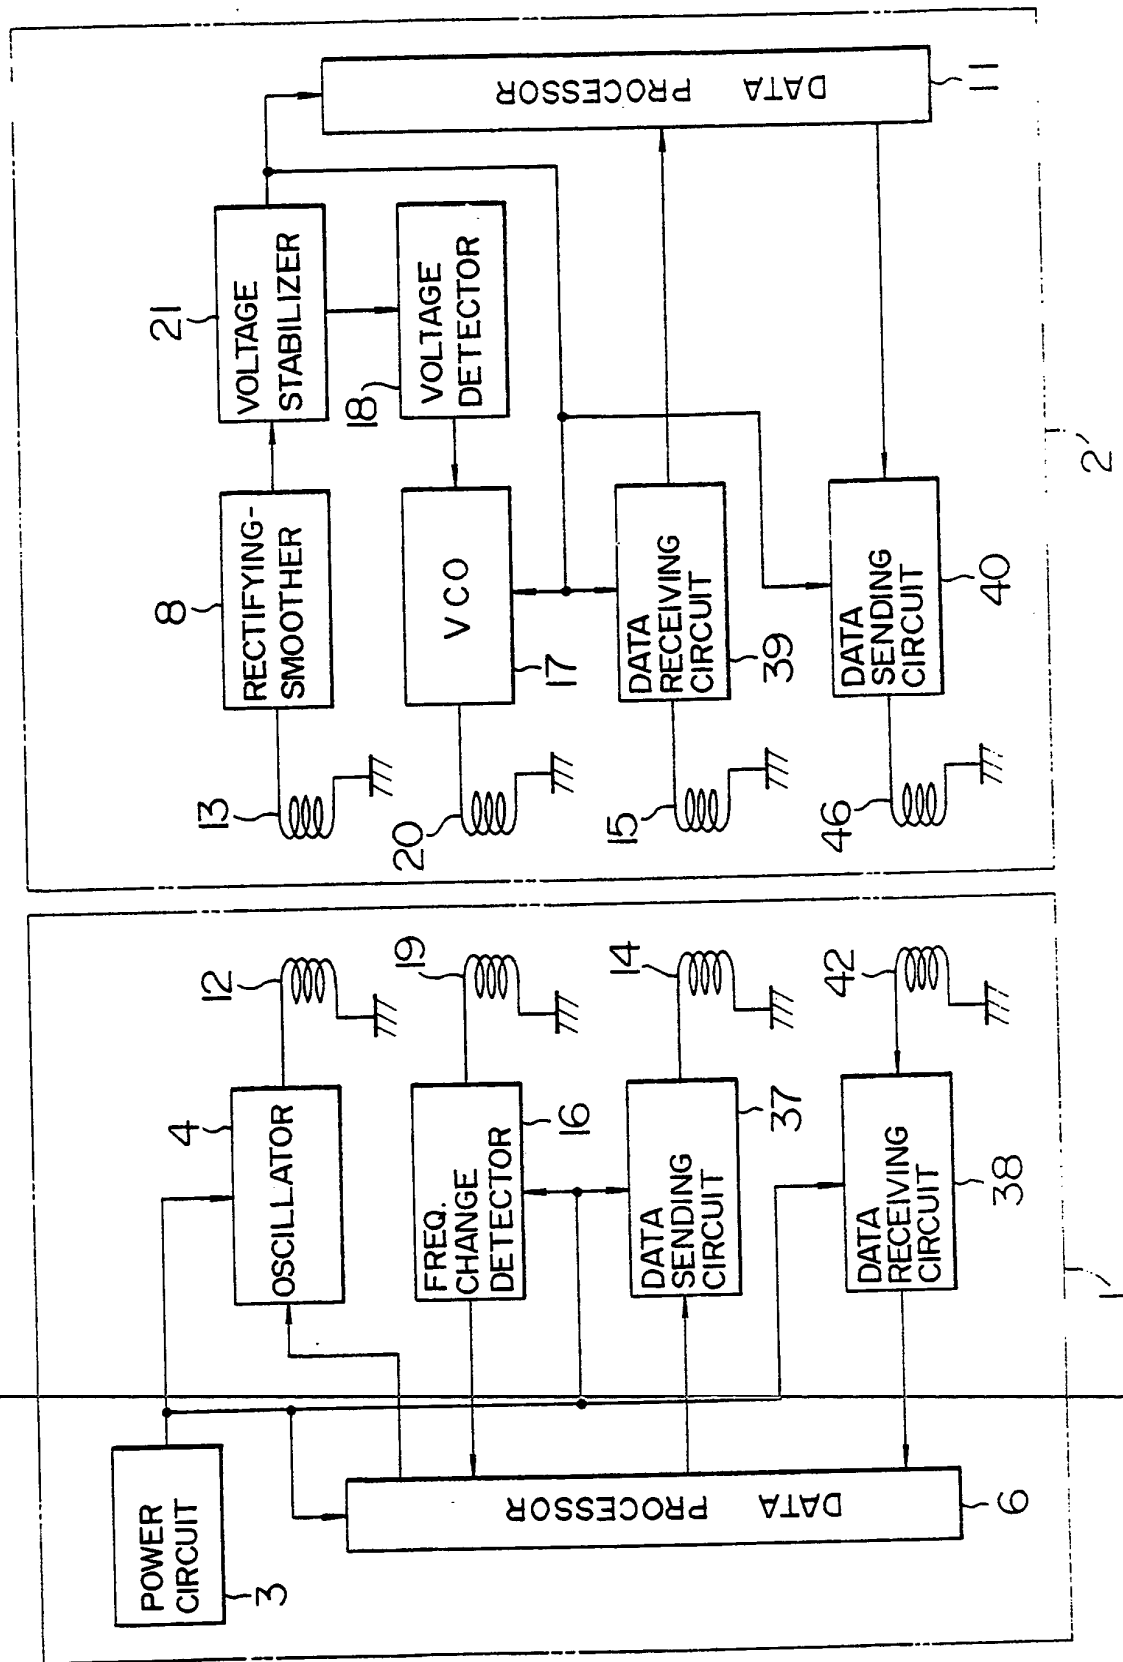

**EUROPEAN PATENT APPLICATION**

Application number: 88308709.0

Int. Cl.<sup>4</sup>: G 06 K 7/08

Date of filing: 20.09.88

Priority: 22.09.87 JP 238212/87  
 15.10.87 JP 260425/87  
 10.11.87 JP 282202/87

Date of publication of application:  
 29.03.89 Bulletin 89/13

Designated Contracting States: FR GB

Date of deferred publication of search report:  
 06.09.89 Bulletin 89/36

Applicant: Hitachi Maxell Ltd.  
 No 1-1-88, Ushitora Ibaraki-shi  
 Osaka-fu (JP)


Inventor: Katayama, Yousuke  
 2-1-401, Togashira-1-chome  
 Toride-shi (JP)

Representative: Williams, Trevor John et al  
 J.A. KEMP & CO. 14 South Square Gray's Inn  
 London WC1R 5EU (GB)

**Method and system of communication for a non-contact IC card.**

Disclosed is a data communication system comprising an external unit, such as a card reader/writer (1), with the ability of reading and writing data for a recording medium, and the recording medium, such as an IC card (2) which transacts signals with the external unit by being coupled electromagnetically in non-contact fashion with the external unit and supplied power from the external unit. The external unit comprises a first data processor (6), a first electromagnetic transducing coil (14) for the electromagnetic coupling with the medium, a carrier wave generator (5) connected to the first coil for generating a carrier for transmitting a signal to the recording medium, and a received signal discriminator (7). The recording medium comprises a second data processor (11), a second electromagnetic transducing coil (15) for the electromagnetic coupling with the external unit, a switching circuit (10) connected to the second coil for varying the load impedance of the second coil in response to a signal to be sent to the first coil, and a received signal detecting circuit (9). The data signal from the recording medium is demodulated for the carrier frequency from the external unit in response to the data signal, and transmitted to the external unit. The recording medium includes circuits (18, 20) which detect a variation in the power voltage supplied through the electromagnetic coupling and feed it back electromagnetically to the external unit.

FIG. 1

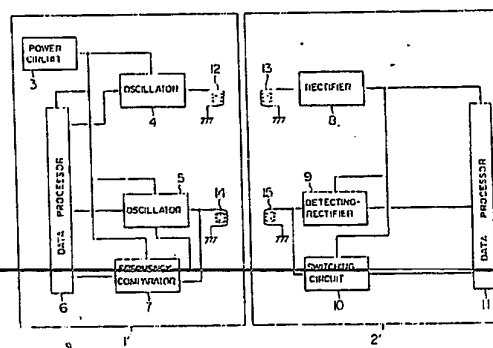



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number

EP 88 30 8709

## DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
X	US-A-4546241 (WALTON) * column 5, line 9 - column 6, line 6; figures 1-2 *	1-4, 10, 11	G06K7/08
A	* column 4, line 52 - line 63 * ---	6	
X	EP-A-204542 (BERTENSHAW) * page 4, line 22 - page 6, line 27; figure 1 *	1-2, 10, 11	
A	---	4, 6	
X	GB-A-2177528 (NIHON LSI CARD) * page 1, line 100 - page 2, line 61; figure 4 *	1-2, 10, 11	G06K
A	-----	4, 6	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int. Cl.4)

Place of search  
THE HAGUE

Date of completion of the search  
06 JULY 1989

Examiner  
GYSEN L. A. D.

### CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone  
Y : particularly relevant if combined with another document of the same category  
A : technological background  
O : non-written disclosure  
P : intermediate document

T : theory or principle underlying the invention  
E : earlier patent document, but published on, or after the filing date  
D : document cited in the application  
L : document cited for other reasons  
.....  
& : member of the same patent family, corresponding document